



P2000 JAT Infrared brooder for 2000 broilers CPIJ0204006

This brooder has a refractive system in order to maximize the infrared emission, providing significant savings in gas consumption.

Capacity

- 2000-3000 Broiler chicken
- 1500-2000 Breeders
- 750-1000 Turkeys

Advantages


- ◆ Stainless steel burner highly resistant to corrosion, designed to prevent dust accumulation.
- ◆ Detachable pilot which facilitates the cleaning and the maintenance
- ◆ Each brooder has a security valve with automatic individual temperature control whereby it is easier handling the heat i the poultry house.
- ◆ Easy maintenance, specialized tools are not required.
- ◆ Emitter made of stainless steel with titanium nonferrous maximizing infrared emission

Materials

- ◆ 100% aluminum screen
- ◆ Electrostatic paint coating resistant to high temperature

Components


- 1 Control valve
- 2 100 % collapsible pilot
- 3 100% collapsible burner

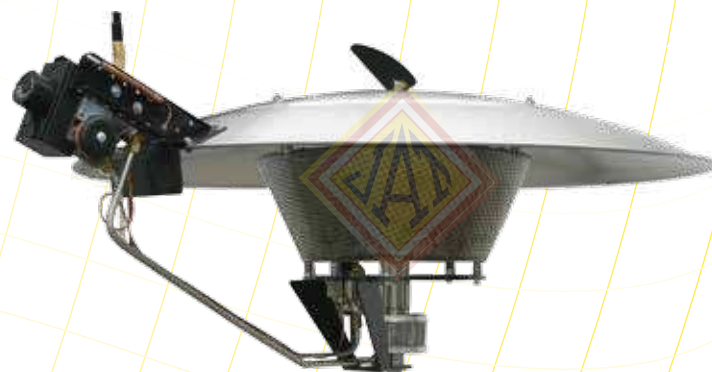

TECHNICAL ESPECIFICATIONS

Capacity		40,000 BTU/Hr	11,720 Watts
Gas supply pressure	Natural LP	12-14 in *wc 6-14 in *wc	30-35 mbar 15-35 mbar
Brooder height		150-180 cm.	1.5-1.8 m.
Distance between brooders		762-1219 cm.	7.6-12.5 m.

*water column

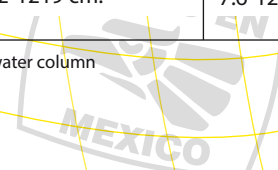

Spare parts



Inside burner



Brooder filter



Brooder Thermocouple



Control Valve



Pilot


Complementary products



22.3m³ Silo



CPIJ0204005
P1000 JAT Infrared brooder
for 1000 broilers

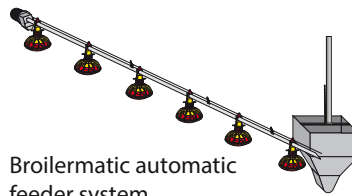

Broilermatic automatic
feeder system



Prolife automatic drinker system